

Elevator Belt Fasteners

Maxi-Splice AB & CI

MAXI-SPLICE AB

- ▶ Non-ferrous metal of very high tensile strength
- ▶ Usable on belts of up to 1200 PIW tensile
- ▶ Non-sparking, non-corroding and non-rusting
- ▶ Bronze color
- ▶ Weight: 2.9 lbs. each



Maxi-Splice AB

MAXI-SPLICE CI

- ▶ Ferrous metal of moderately high tensile strength
- ▶ Usable on belts of up to 600 PIW tensile
- ▶ Silver color
- ▶ Weight: 2.6 lbs. each



Maxi-Splice CI

FEATURES (AB & CI)


- ▶ Mechanical clamping device with a simple three-piece construction
- ▶ Use on PVC and rubber belting
- ▶ Use 4" long bolts for belts up to 1/4" thick
- ▶ Use 4 1/2" long bolts for belts between 1/4" and 1/2" thick
- ▶ Use 5" long bolts for belts between 1/2" and 3/4" thick
- ▶ Maximum operating temperatures: AB - 500°F, CI - 600°F
- ▶ Each splice set accommodates two inches of belt width

U.S. Patent # 4,540,389

PART NUMBERS/ACCESSORIES

- ▶ MBG2 Maxi-Splice CI
- ▶ MBG2-AB Maxi-Splice AB
- ▶ MBGT Belt Power Punch Tool

FREE
Elevator & Conveyor
Engineering
Design Service

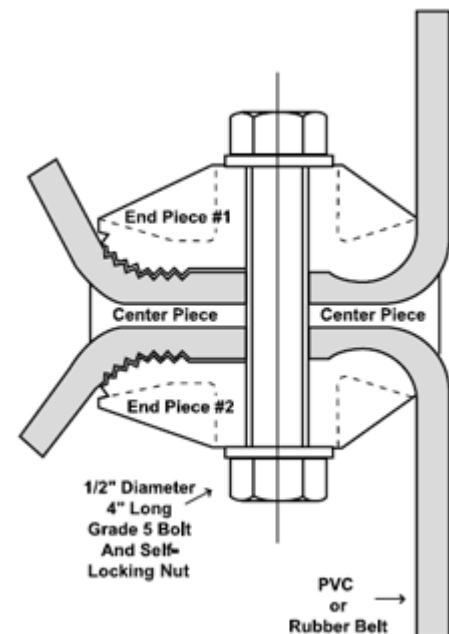

Detailed specification, wiring diagrams and installation/operating instructions available immediately upon request.

Please refer to instruction manual for correct installation. Information subject to change or correction. March 2008.