





FANG Bolts

TECHNOLOGY · INNOVATION · QUALITY · VALUE

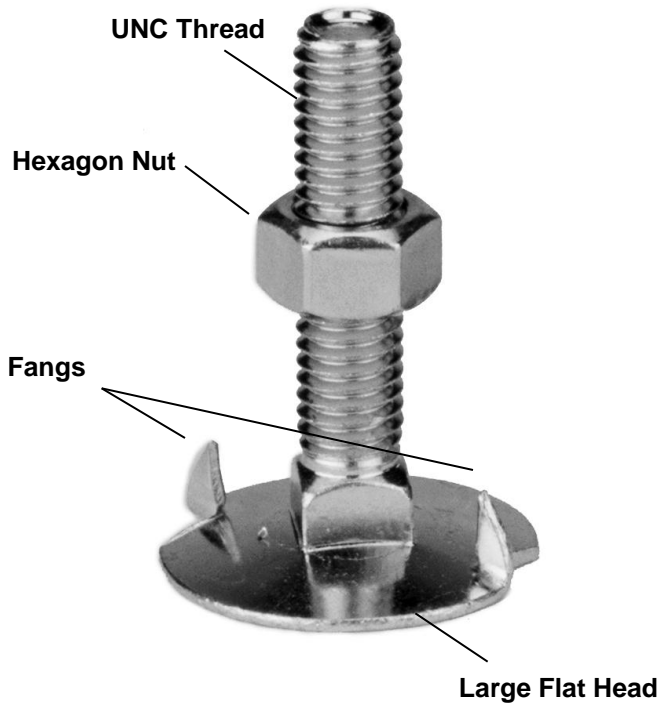

FANG Bolts

- Unique Design – Fangs bite into belt, locking bolt in place while nut is tightened.
- Eases fitting and removal of nut
- Large bolt head diameter = maximum resistance to pull through
- Flat bolt head – pulls fully flush into belt -reduces risk of rip out of bolt due to head protruding from back of belt
- Extensively tested and used in USA industry
- Suitable for recessed or non recessed bolt holes
- Ideal for CC-S Buckets

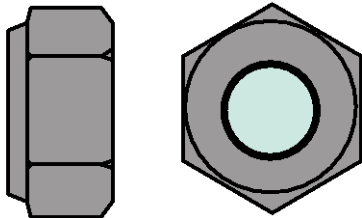

Option: Nylon insert self-locking nut for additional security (DIN 985)

**Free Design Service
& Technical Support
from our team of
specialist engineers**

Please refer to instruction manual for correct installation.
Information subject to change or correction. September 2007.



Technical Specifications

Size	Part Number		Head Diameter	No./Box	Wt./Box (lbs.)
	Zinc Plated Steel	Stainless Steel			
1/4" x 3/4"	HFQH4075Z	-----	1"	100	2.40
1/4" x 1"	HFQH4100Z	HFQ4100S4	1"	100	2.40
1/4" x 1-1/4"	HFQH4125Z	HFQ4125S4	1"	100	2.55
1/4" x 1-1/2"	HFQH4150Z	HFQ4150S4	1"	100	2.85
1/4" x 2"	HFQH4200Z	HFQ4200S4	1"	100	3.80
5/16" x 1"	HFQH6100Z	-----	1-3/16"	100	4.10
5/16" x 1-1/4"	HFQH6125Z	HFQ6125S4	1-3/16"	100	4.45
5/16" x 1-1/2"	HFQH6150Z	HFQ6150ZS4	1-3/16"	100	4.80
5/16" x 1-3/4"	HFQH6175Z	HFQ6175S4	1-3/16"	100	5.20
5/16" x 2"	HFQH6200Z	HFQ6200S4	1-3/16"	100	5.60
3/8" x 1-1/4"	HFQH8125Z	HFQ8125S4	1-1/4"	100	6.60
3/8" x 1-1/2"	HFQH8150Z	HFQ8150S4	1-1/4"	100	7.10
3/8" x 1-3/4"	HFQH8175Z	-----	1-1/4"	100	8.10
3/8" x 2"	HFQH8200Z	HFQ8200S4	1-1/4"	100	8.10

Please refer to instruction manual for correct installation.
Information subject to change or correction. September 2007.