



SUPER STARCO

The new range of deep Super Starco buckets is the result of intensive research to achieve the maximum individual bucket capacity, while still maintaining the perfect fill and discharge characteristics of the original standard starco bucket over a wide speed range.

Super Starco is the optimum versatile bucket design combining maximum throughput with the economy of fewer buckets per metre of belt.

SUPER STARCO

Du Génie à pleins godets: La nouvelle gamme de godets Super Starco est le résultat d'une recherche approfondie afin d'obtenir le maximum de capacité par godet, tout en maintenant les caractéristiques parfaites de remplissage et de déchargement du godet Starco original, dans une large gamme de vitesses.


Le Super Starco, toujours de conception emboutie monobloc, allié à la haute technicité du godet Starco, par sa forme parabolique, lui confère des performances exceptionnelles en réduisant le nombre au mètre.

SUPER STARCO

HDP/Nylon/Polyurethane

SUPER STARCO

HDP/Nylon/Polyuréthane

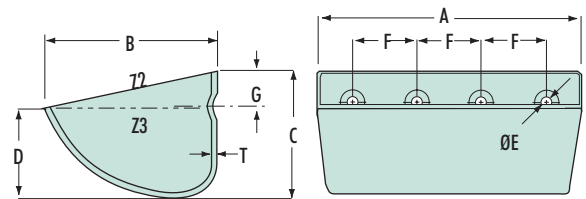

Plastic buckets require a large flat washer of minimum 30mm O/D between the hex nut and the inside of the bucket.

* Recessed Holes

Nous conseillons l'emploi de rondelles larges, Ø 30mm mini pour le montage des Godets plastiques.

* Trous Emboutis

SPECIFICATION

No.	A (mm)	B (mm)	C (mm)	D (mm)	T (mm)	kg	Capacity (Litres)		Holes / Trous			Max. Pcs/Mtr	
							Z2 (total)	Z3 (eau)	No.	E (Ø mm)	F (mm)		G (mm)
SPS140-120 HDP	145	120	90	62	5	0.17	0.80	0.61	2	8.5*	70	25	10.80
SPS180-140 HDP	187	150	112	77	6	0.32	1.77	1.35	2	9.0*	100	30	8.60
SPS200-150 HDP	205	150	112	75	6	0.35	1.82	1.39	2	9.5*	100	32	8.60
SPS240-165 HDP	250	170	132	93	7	0.60	3.15	2.34	2	11.0*	120	35	7.40
SPS280-165 HDP	290	168	132	93	7	0.69	3.60	2.80	3	11.0	80	36	7.40
SPS280-180 HDP	290	185	140	97	7	0.85	4.20	3.30	3	11.0	80	36	7.00
SPS300-180 HDP	316	185	140	97	8	0.92	4.60	3.60	3	11.0	100	36	7.00
SPS300-215 HDP	318	220	168	117	9	1.28	6.60	5.20	3	11.0	100	50	5.88
SPS330-215 HDP	340	220	168	117	9	1.37	7.17	5.66	3	11.0	120	50	5.88
SPS350-215 HDP	368	220	168	117	9	1.45	7.75	6.12	3/4	11.0	120/90	50	5.88
SPS370-215 HDP	390	220	168	117	9	1.52	8.25	6.52	4	11.0	90	50	5.88
SPS400-215 HDP	420	220	168	117	9	1.54	8.95	7.00	4	11.0	100	50	5.88
SPS450-215 HDP	470	220	165	115	9	1.60	9.50	7.70	5	11.0	90	50	5.88
SPS500-215 HDP	520	220	168	117	9	1.96	11.25	8.91	5	11.0	100	50	5.88